

▶▶▶ 19" Rack Fiber Patch Panel

Feature:

- 1U 19" rack patch panel, sliding type
- Available for SC,ST,FC,LC Adapter, simplex & duplex
- The case body is made from cold rolled steel sheet, and the surface use the technique of electrostatic spraying
- The front panel can be changeable upon request
- Size: 483mm*206mm*45mm(1U)
- Color Available: Black, Grey
- Net weight is around 2.7KG
- Operating Temperature: - 25° C ~70° C
- Storage Temperature: - 25° C ~85° C
- Relative Humidity: ≤85 ~ +30° C
- Air pressure: 70Kpa ~ 106Kpa

Application:

- Optic Access Network
- Local Area Network
- FTTH
- Telecommunication

Standard Accessories:

- Splice Tray(12 core or 24 core available)
- Heat sleeves
- Cable gland
- Cable Tie
- Cage nut
- Cable organizer
- Installing Screws


FT-PP05



12 port Duplex



24 port Simplex

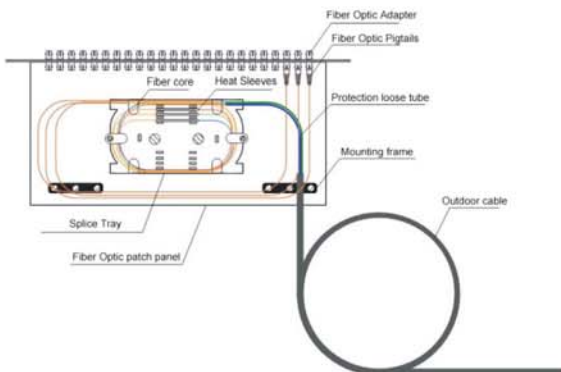

Structure drawing

Adapter Plate

Width	Configuration
465mm(18.31")	6 ports SC(Duplex)/LC(Quad)
	12 ports SC(Duplex)/LC(Quad)
	24 ports SC(Duplex)/LC(Quad)
	6 ports SC(Duplex)/LC(SC Foot)
	12 ports SC(Simplex)/LC(SC Foot)
	24 ports SC(Simplex)/LC(SC Foot)
	12 ports ST/FC
	24 ports ST/FC

Order Information:

P/N	Dimension(mm)	Fiber Port	Max. Capacity(core)	Adapter
FT-PP05-12SC	483 × 206 × 1U	12 Simplex	12	SC
FT-PP05-24SC	483 × 206 × 1U	24 Simplex	24	SC
FT-PP05-12SCD	483 × 206 × 1U	12 Duplex	24	SC
FT-PP05-24SCD	483 × 206 × 1U	24 Duplex	48	SC
FT-PP05-12LC	483 × 206 × 1U	12 Simplex	24	LC with footprint
FT-PP05-24LC	483 × 206 × 1U	24 Simplex	48	LC with footprint
FT-PP05-12ST	483 × 206 × 1U	12 Simplex	12	ST
FT-PP05-24ST	483 × 206 × 1U	24 Simplex	24	ST