


▶▶▶ UTP Cat.6 Lan Cable

Application:

- 100MHZ Category 5e, Gigabit Ethernet
- Multimedia and Telephone network etc
- ATM155/ATM622
- ISDN
- TP-PMD Audio
- Token ring
- Suitable for Indoor use

Standard:

- Verified to TIA/EIA 568A/568B
- ISO11801
- EN50173
- IEEE802.3U/IEEE802.5

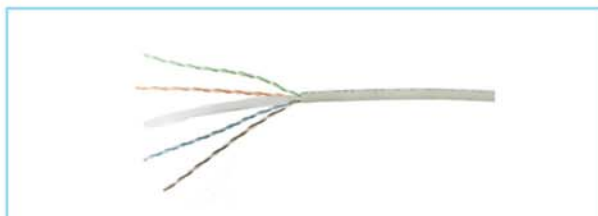

Parameter:

| | | |
|-------------------|--------------|---------------------------------------|
| Conductor | Material | Bare copper/CCA(Copper Clad Aluminum) |
| | Size | 23AWG(0.57mm) |
| | Construction | 4*2*0.57mm |
| Insulation | Material | HD-PE |
| | Thickness | Min.:0.18mm Max.:0.20mm |
| | Diameter | 1.02mm±0.03mm |
| | | Blue-White/Blue |
| | | Orange-White/Orange |
| | | Green-White/Green |
| | | Brown-White/Brown |
| | Pair | 4 pairs |
| Jacket | Material | PVC/LSZH |
| | Color | Customized |
| | Thickness | Min. at any point:0.40mm Max.: 0.50mm |
| Ripcord | | YES |
| Outer diameter | | 5.3mm±0.3mm |
| Temperature range | | -20°C - +85°C |

Order Information:

| P/N | Description |
|--------------|--|
| FT-LCU6P305G | UTP Cat.6 Lan cable,PVC Jacket Grey 305M |
| FT-LCU6P305G | UTP Cat.6 Lan cable,PVC Jacket Grey 305M |

* Different jacket color is optional